
PEARSON™ CURRENT MONITOR MODEL 7760



Sensitivity	1.0 Volt/Ampere ±1%
Output resistance	50 Ohms
Maximum peak current	500 Amperes
Maximum rms current	20 Amperes
Droop rate	0.5 %/microsecond
Useable rise time	50 nanoseconds
Current time product	5 mA·s
Low frequency 3dB point	750 Hz (typical)
High frequency 3dB point	7.0 MHz (typical)
I/f figure	0.03 rms Amperes/Hz
Output connector	BNC
Operating temperature	0 to 65 °C
Weight	5.5 pounds

© 2005 Pearson Electronics, Inc. 7760.wpd 050330

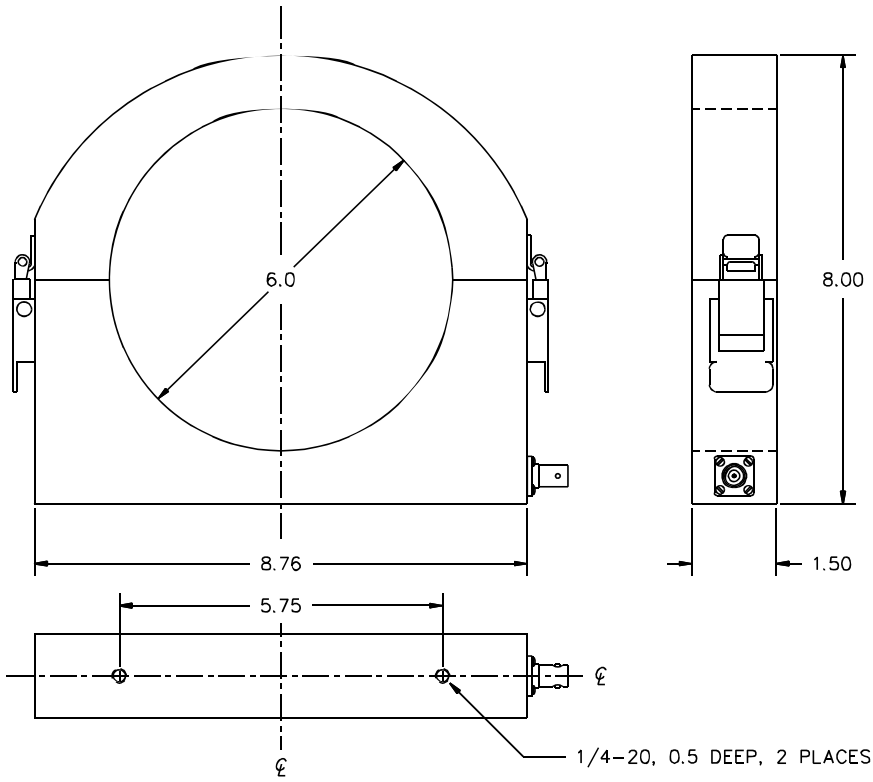

Pearson Electronics, Inc. • 4009 Transport Street • Palo Alto, CA 94303
Telephone 650-494-6444 • FAX 650-494-6716 • www.pearsonelectronics.com